LMP Bluetooth Keypad WKP-1314

Apple Bluetooth-enabled computer with stand-alone WKP-1314 for productive working

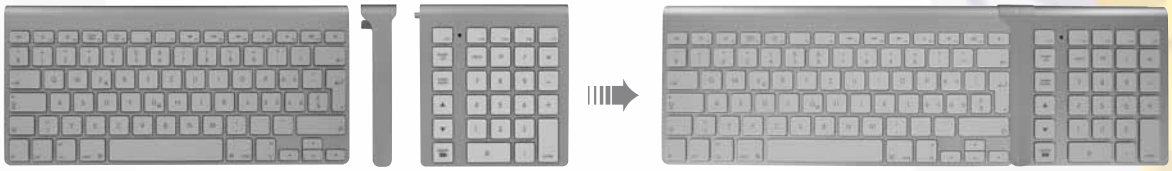

Apple wireless (Bluetooth) keyboard (A1314) | Linkage bar | WKP-1314 | Fullsize wireless (Bluetooth) keyboard with keypad

Key Features

- 28-key wireless (Bluetooth) keypad for easy and fast work with numbers, tables, calculations, spread sheets, etc.
- Linkage bar connects the WKP-1314 seamlessly with the Apple wireless keyboard (A1314) – a perfect alternative solution to the Apple wired USB keyboard!
- Keys include 0-9, operation keys, decimal key, hot-keys F13 to F17, page up/down, arrow up/down, delete forward, clear all, decimal point/comma, enter key
- Power on/off, pairing button, power on bar for activating Apple wireless keyboard, LED status signal
- Bluetooth wireless technology for conveniant wireless access to any Bluetooth-enabled Macintosh computer. No dongle or driver installation required!
- Can be used as a stand-alone wireless keypad with any MacBook or MacBook Pro or any Macintosh Bluetooth-enabled computer
- Designed to fit the Apple wireless keyboard in an elegant way
- Broadcom Bluetooth chipset
- Plastic housing with aluminum-like surface
- Scissor-type membrane keys for high comfort typing and reduced typing tiredness

Package Contents & Specs

- WKP-1314 28-key Bluetooth keypad
- Linkage bar
- 2 pcs. AA batteries
- Manual English/Deutsch/Français
- Connection: Bluetooth 2.1
- Weight: 85 g (including batteries)
- Keypad size: 130x125x18 mm (without linkage bar), 130x136x18 mm (with linkage bar connected)
- Approvals: CE and FCC certified

System Requirements

- Mac OS X 10.5.x or higher
- Bluetooth-enabled Macintosh computer
- Keypad does not work with iPad !
- Windows OS not supported!

no dongle Bluetooth no driver required!

Transmission Technology	Bluetooth 2.1 wireless technology (Broadcom Bluetooth chipset)
Approvals	CE (EMC:EN301489-1/-17; RF: EN300328; LVD: EN60950-1), FCC (Part15B and Part15C(15.247)
Key Force, Traveling Distance	55 ± 7 g, 2.1 ± 0.2 mm
Input Power	3.0 VDC, 100 mA
Battery	2 x AA batteries or rechargeable batteries
Operating Temperature	0 to 50° C (10% to 95% relative humidity, 25° C)
Storage Temperature	-10 to 65° C (5% to 90% relative humidity, 25° C)

cropmark ag

Distribution: **Cropmark AG**
Jurastrasse 56, CH-5430 Wettingen
Fon +41 (0)56 437 60 70, Fax +41 (0)56 437 60 77
www.cropmark.ch, info@cropmark.ch

Worldwide Business Development/Distribution:

1.00, 9/2010, E